

Top Expansion Bay

You can select from the following options.



FZ-VBRG211	FZ-VUBG211	FZ-VLNG211	FZ-VSRG211	FZ-VTSG211
Barcode Reader	USB Port	LAN Port	Serial Port	Thermal Imaging Camera

Inserting an option to the top expansion bay

1. Turn off the computer and disconnect the AC adaptor.

IMPORTANT

- We recommend that you turn off the computer completely the following.

1. Click  (Start) -  (Settings) - [Update & Security] - [Recovery].
2. Click [Restart now] under “Advanced startup”.
3. Click [Turn off your PC].


2. <For tablet> Turn your computer over.

Make sure no foreign objects are under the computer.


3. Remove the battery pack. ( [Replacing the Battery Pack](#))

4. Insert an option to the top expansion bay.

1. If the dummy cover is inserted, remove it.
Remove the screws (A) and the dummy cover.

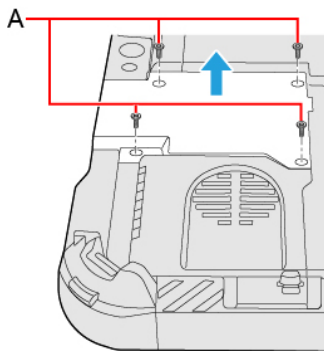


2. Insert an option.

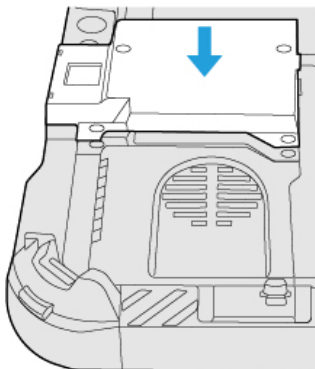

3. Tighten the screws (B) firmly.
Use the PH 1 (PH #1) screwdriver.

Use 4 screws (Silver).

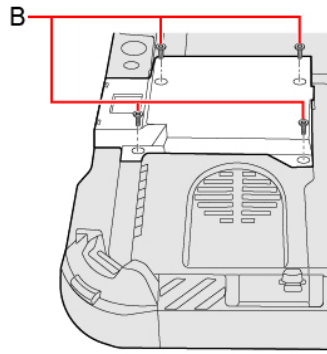

Recommended tightening torque

0.45 N·m ± 0.05 N·m (4.5 kgf·cm ± 0.5 kgf·cm)

5. Insert the battery pack.

NOTE

<Only for model with Barcode Reader>

- Change the setting of [A1 Button], [A2 Button], [A3 Button] or [Rotation Lock Button] to [Barcode Reader Trigger] with Setup Utility. ( [Tablet Button Configuration](#))